InLine® USB-A cable coupling, waterproof IP68, USB-A female to male, 50cm, shielded

INSTRUCTION MANUAL

- Connector body: Nylon (PA66)
- Thread size: M20
- Module: USB-A female/male
- Sealing: Silicon gel
- Transmission rate: 5 Gb/s
- Current rating: 2 A
- Voltage rating: 5 V
- Charge: yes
- Waterproof level: IP68
- Temperature rating: -25 °C to +105 °C

1. Disassemble the adapter into its individual parts.

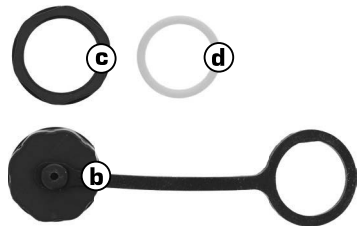

a - coupling with 50 cm cable and USB-A plug, b - rubber seal with cover, c - retaining ring, d - green sealing ring

2. Guide the coupling with the side of the socket, e.g. through the opening provided in the panel, to the outside. Then place the rubber seal with cover (b) over the housing protruding from the outside.

3. Secure the seal with the retaining ring (c). Insert the green sealing ring (d). The coupling is now ready for use.

4. Screw on the protective cap to protect the connection from dust and water when not in use.

service@inline-info.com
22 PAP
INTOS ELECTRONIC AG
SIEMENSSTRASSE 11
D-35394 GIESSEN

InLine® USB-A-Kabelkupplung, wasserdicht IP68, USB-A Buchse zu Stecker, 50cm, geschirmt

BEDIENUNGSANLEITUNG

- Material: Nylon (PA66)
- Gewindegröße: M20
- Modul: USB-A Buchse/Stecker
- Dichtung: Silikon
- Übertragungsrate: 5 Gb/s
- Strom: 2 A
- Spannung: 5 V
- Aufladen: ja
- Schutzgrad: IP68
- Temperaturbeständigkeit: -25 °C bis +105 °C

1. Zerlegen Sie den Adapter in seine Einzelteile.

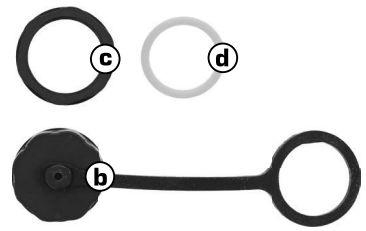

a - Kupplung mit 50 cm Kabel und USB-A Stecker, b - Gummidichtung mit Deckel, c - Befestigungsring, d - grüner Dichtungsring

2. Führen Sie die Kupplung mit der Seite der Buchse z. B. durch die vorgesehene Öffnung im Panel nach Außen. Legen Sie anschließend die Gummidichtung mit Deckel (b) über das außenstehende Gehäuse.

3. Fixieren Sie die Dichtung mit dem Befestigungsring (c). Stecken Sie den grünen Dichtungsring auf (d). Die Kupplung ist nun einsatzbereit.

4. Schrauben Sie die Schutzkappe auf, um den Anschluss bei Nichtgebrauch vor Staub und Wasser zu schützen.

service@inline-info.com
22 PAP
INTOS ELECTRONIC AG
SIEMENSSTRASSE 11
D-35394 GIESSEN

Size: 120 x 210mm,