

INLINE® MINI SAS HD CABLE

SFF-8643 angled to 4x SATA + Sideband


This internal mini SAS HD cable is suitable for connecting devices with a Mini SAS HD 4i (SFF-8643) interface and other side with SATA connector, for example it can be connected to a SAS controller with a backplane or HDD

- Mini SAS HD connector (SFF-8643) to 4x SATA connector + Sideband plug
- Angled SFF-8643 plug
- Cable for internal connection

Item No.	Length	EAN
27631A	0.50 m	4043718211814
27631B	1 m	4043718211821

Technical Data	
Article height:	1.5 cm
Article width:	1.8 cm
Brand:	InLine®
Colour:	Black
Side A:	SATA plug
Side B:	SFF-8643 connector angled
Signal:	Data
Туре:	Mini SAS HD
Type of packaging:	InLine® bag 20103A
UL:	No
Variant:	Sideband, angled



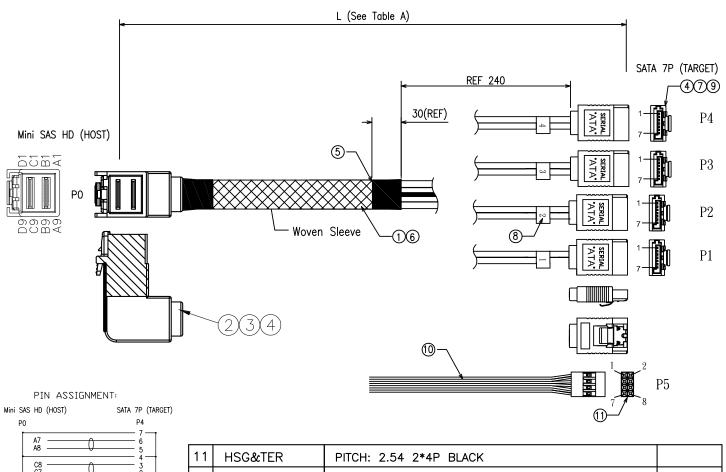

)		P4
A7 —	^	7 7
Ã8 ——		°
00		4
C8 ——— C7 ———	()	5 4 3 2
		— ī →
		P3
B7 —		
B8 ——		
D8 —		5 4 3 2
D7	<u> </u>	ž
		— 1 →
		P2
		— 7 →
A4 A5		6 5
A3		3 4
C5	\cap	3 2
C4		2
		P1
		7 _
B4	Λ	6
B5	<u> </u>	5
D5		4 3
D4	V	2 1
— A3,A6,A9,		
C3,C6,C9	,D3,D6,D9	P5
D1		2
D2 —		1
C1 ——		 4
C2 ——		3
B1 ————————————————————————————————————		6 5
A1 ——		—— š
A2		—— 7

11 HSG&TER PITCH: 2.54 2*4P BLACK 10 CABLE 2 FLAT CABLE 30AWG*8C 9 PVC PVC 45% BLACK UL94V-0 8 LABEL LABEL PRINT P1 & P2 & P3 & P4 7 CONN 2 SATA 7P RECEPTACLE BLACK CONTACT:G/F W/CLIP 6 WOVEN SLEEVE WOVEN SLEEVING TUBE BLACK 5 H.S.T HEAT SHRINK TUBE BLACK ID:9.5mm 4 PE PE LOW DENSITY 3 PBT PBT BLACK
9 PVC PVC 45% BLACK UL94V-0 8 LABEL LABEL PRINT P1 & P2 & P3 & P4 7 CONN 2 SATA 7P RECEPTACLE BLACK CONTACT:G/F W/CLIP 6 WOVEN SLEEVE WOVEN SLEEVING TUBE BLACK 5 H.S.T HEAT SHRINK TUBE BLACK ID:9.5mm 4 PE PE LOW DENSITY
8 LABEL LABEL PRINT P1 & P2 & P3 & P4 7 CONN 2 SATA 7P RECEPTACLE BLACK CONTACT:G/F W/CLIP 6 WOVEN SLEEVE WOVEN SLEEVING TUBE BLACK 5 H.S.T HEAT SHRINK TUBE BLACK ID:9.5mm 4 PE PE LOW DENSITY
7 CONN 2 SATA 7P RECEPTACLE BLACK CONTACT:G/F W/CLIP 6 WOVEN SLEEVE WOVEN SLEEVING TUBE BLACK 5 H.S.T HEAT SHRINK TUBE BLACK ID:9.5mm 4 PE PE LOW DENSITY
6 WOVEN SLEEVE WOVEN SLEEVING TUBE BLACK 5 H.S.T HEAT SHRINK TUBE BLACK ID:9.5mm 4 PE PE LOW DENSITY
5 H.S.T HEAT SHRINK TUBE BLACK ID:9.5mm 4 PE PE LOW DENSITY
4 PE PE LOW DENSITY
3 PBT PBT BLACK
2 CONN 1 MINI SAS 4i PLUG CONTACT:G/F W/LATCH W/PCB
1 CABLE 1 (30AWG*2C+2D)*ALMYLAR+MYLAR W/C JACKET
NO. PART NAME SPEC DESCRIPTION REMAKE

ELECTRICAL CHARACTER:

- a. 100% OPEN&SHORT TESTING
- b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec
- c. INSULATION RESISTANCE:5M Ohm(Min)
- d. CONDUCTIVE RESISTANCE:5 Ohm(Max).

If you have any further questions, please contact marketing@inline-info.com

www.inline-info.com/en/

Disclaimer

InLine® is a brand of INTOS ELECTRONIC AG | Siemensstraße 11 | D-35394 Gießen

$\textbf{Documentation} \circledcirc \textbf{2024 INTOS ELECTRONIC AG}$

All rights reserved. No part of this document may be reproduced in any form or by any means, electronic, mechanical or chemical, without the prior written permission of the publisher. It is possible that this document may still contain typographical faults or misprints.

However, the information in this deocument will be checked regularly and corrections will be made in the next edition. We accept no liability for errors of a technical or printing nature and their consequences. All trademarks and industrial property rights are acknowledged. Changes in the sense of technical progress can be made without prior notice. Our products, including packaging, are not toys, they may contain small parts and sharp objects.