GAMEPORT CABLE, INLINE®, DB15 M/F

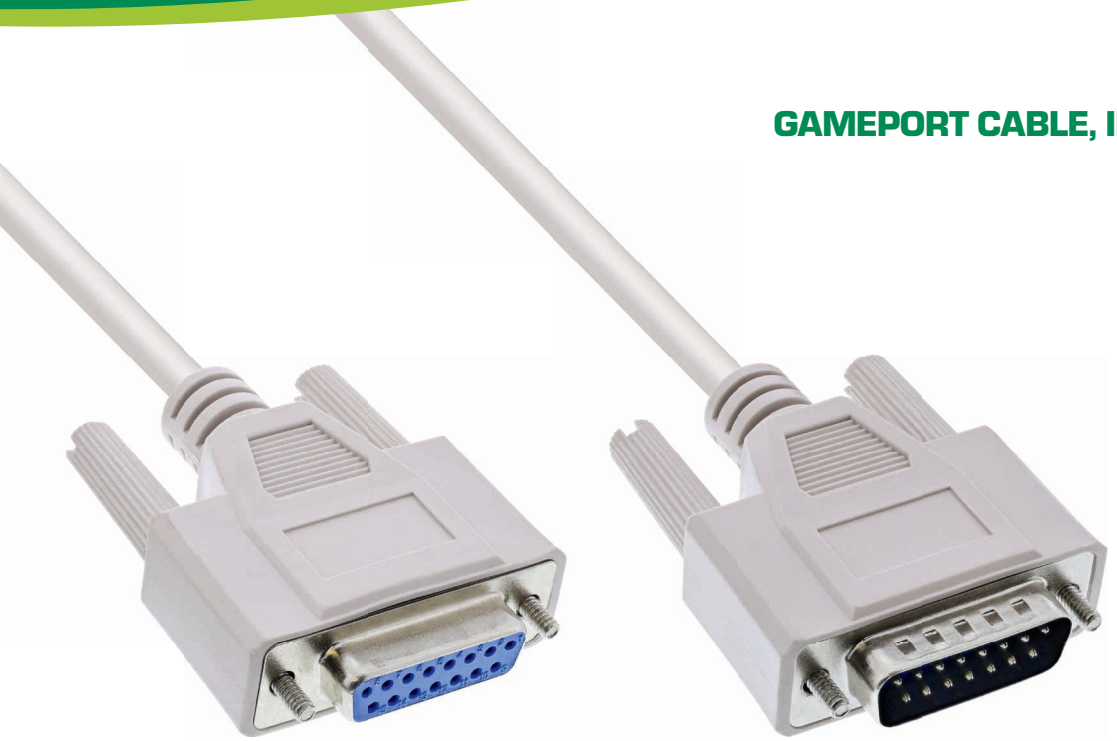

- 15pin Sub D plug to 15 pin Sub D socket
- 1:1 pin assignment, molded

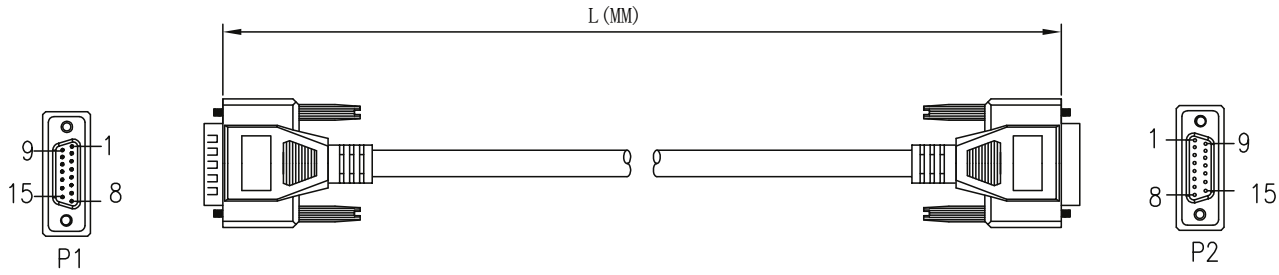

NOTES:
1. MATERIALS
   1.1 CABLE: 7/0.12TCX15C+7/0.12TC+AM, GREY(7534C) PVC JACKET.
       OD=⌀5.8 ± 0.15mm.
       CABLE MARKING: inLINE® COMPUTER INTERFACE CABLE 30V 80℃
   1.2 P1: DB 15PIN MALE: SOLDER TYPE,
       GOLD FLASH CONTACTS, NICKEL PLATED SHELL;
   1.3 P2: DB 15PIN FEMALE: SOLDER TYPE,
       GOLD FLASH CONTACTS, NICKEL PLATED SHELL;
   1.4 HOOD MOLDED GREY(7534C) PVC.
   1.5 THUMB SCREW TO BE MOLDED GREY(7534C) PVC.
2. ELECTRICAL
   2.1 100% OPEN AND SHORT TEST.
   2.2 CONDUCTOR RESISTANCE: 10 OHMS MAX.
   2.3 INSULATION RESISTANCE: 10 MEGOHMS MIN.
   2.4 HI-POT: DC300V/0.01S.
3. ALL MATERIAL BE RoHS COMPLIANT.

PIN	P1	OUT	P2	
1	———	1	BROWN
2	———	2	RED
3	———	3	ORANGE
4	———	4	YELLOW
5	———	5	GREEN
6	———	6	BLUE
7	———	7	VIOLET
8	———	8	GREY
9	———	9	WHITE
10	———	10	BLACK
11	———	11	DARK GREEN
12	———	12	PINK
13	———	13	LIGHT BLUE
14	———	14	LIGHT GREEN
15	———	15	DEEP BLUE
SHELL	DRAIN WIRE		SHELL	

Art. Nr.	EAN	Length
17740	4043718001309	2 m
17746	4043718001323	5 m
17749	4043718001293	10 m