InLine® Patch cable coupling, mini, Cat.6A, waterproof IP68, 2x RJ45 socket, shielded

INSTRUCTION MANUAL

- Connector body: Nylon (PA66)
- Thread size: M20
- Module: Cat.6A female/female
- Shielded: yes
- Sealing: Silicon gel
- Transmission rate: max. 10 Gb/s
- Transmission distance: max. 100 m
- Bandwidth: 500 MHz
- Waterproof level: IP68
- Temperature rating: -40 °C to +105 °C
- Cable diameter: 1.5-4.5 mm, 4.5-7.5 mm

1. Disassemble the adapter into its individual parts.

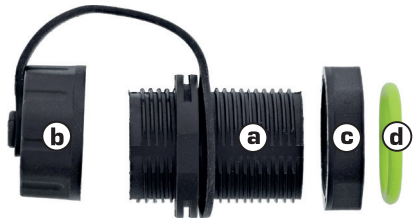

a - coupling, b - rubber seal with cover, c - retaining ring, d - green sealing ring

2. Guide the longer side of the coupling e.g. through the opening provided in the panel to the outside. Then place the rubber seal with cover (b) over the housing protruding outside.

3. Secure the seal with the retaining ring (c). Insert the green sealing ring (d). The coupling is now ready for use.

4. Screw on the protective cap to protect the connection from dust and water when not in use.

service@inline-info.com
22 PAP
INTOS ELECTRONIC AG
SIEMENSSTRASSE 11
D-35394 GIESSEN

InLine® Patchkabelkupplung, mini, Cat.6A, wasserdicht IP68, 2x RJ45 Buchse, geschirmt

BEDIENUNGSANLEITUNG

- Material: Nylon (PA66)
- Gewindegröße: M20
- Modul: Cat.6A Buchse/Buchse
- Schirmung: Ja
- Dichtung: Silikon
- Übertragungsrate: max. 10 Gb/s
- Übertragungsdistanz: max. 100 m
- Bandbreite: 500 MHz
- IP Schutzklasse: IP68
- Temperaturbeständigkeit: -40 °C bis +105 °C
- Kabeldurchmesser: 1,5-4,5 mm, 4,5-7,5 mm

1. Zerlegen Sie den Adapter in seine Einzelteile.

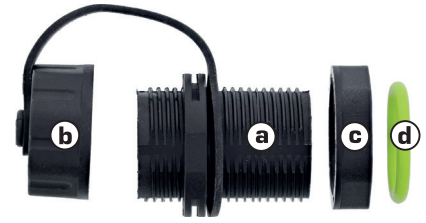

a - Kupplung, b - Gummidichtung mit Deckel, c - Befestigungsring, d - grüner Dichtungsring

2. Führen Sie die längere Seite der Kupplung z. B. durch die vorgesehene Öffnung im Panel nach Außen. Legen Sie anschließend die Gummidichtung mit Deckel (b) über das außenstehende Gehäuse.

3. Fixieren Sie die Dichtung mit dem Befestigungsring (c). Stecken Sie den grünen Dichtungsring auf (d). Die Kupplung ist nun einsatzbereit.

4. Schrauben Sie die Schutzkappe auf, um den Anschluss bei Nichtgebrauch vor Staub und Wasser zu schützen.

service@inline-info.com
22 PAP
INTOS ELECTRONIC AG
SIEMENSSTRASSE 11
D-35394 GIESSEN

Size: 120 x 210mm,