INLINE® SLOT BRACKET FOR 2X SUB-D 9-PIN

can be used on both sides, pack of 2

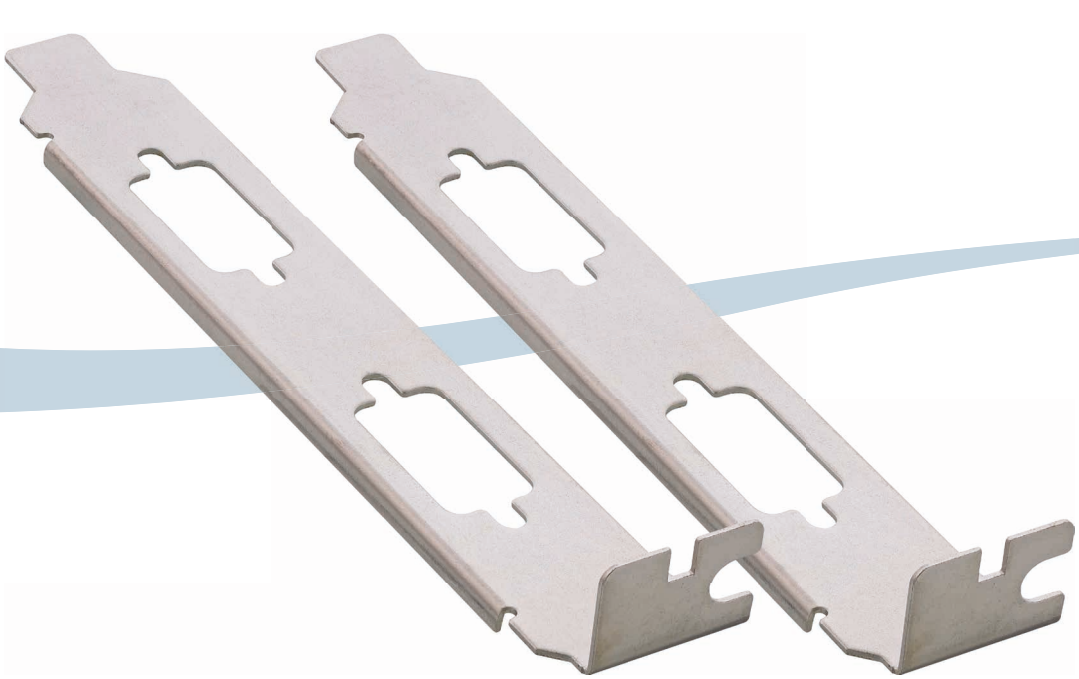

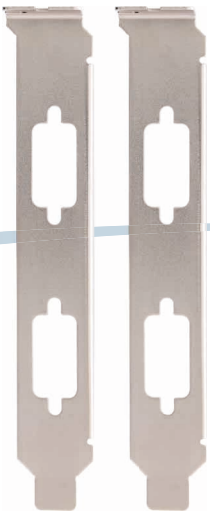

- **Flexible application options:** Supports both male and female 9-pin Sub-D connectors for maximum compatibility in IT environments.
- **Easy housing integration:** Simply mounts into a free PCI slot – ideal for professional IT systems and server housings.
- **Robust metal design:** Made of sturdy sheet steel for long-lasting durability and secure fastening of the connectors.
- **Ideal for serial interfaces:** Perfect for setting up or expanding RS232 connections in industrial or professional applications.
- **Dual connection option:** Space for two 9-pin Sub-D plugs or sockets – saves space and increases connection density.

The InLine® slot bracket allows easy installation of two 9-pin Sub-D plugs or sockets on the rear of a PC or server housing. Thanks to its standardised design, it fits into any free PCI slot and offers a clean, stable solution for integrating serial interfaces. The robust metal design ensures reliable fastening – ideal for industrial environments, server rooms or professional IT systems.

Whether for control devices, measuring systems or serial communication: this slot bracket provides the ideal basis for connecting classic RS232 components. System houses, system integrators and industrial users in particular benefit from the flexibility and quality of this mounting aid.

- Material: sheet steel
- Mounting position: PCI slot (low profile not supported)
- Reception: 2x 9-pin Sub-D (m/f, individually assignable)
- Scope of delivery: Pack of 2

Technical Data	
Article height:	1.3 cm
Article length:	12.2 cm
Article width:	1.8 cm
Low Profile:	No
PU:	2
Type:	Serial, low profile

Item No.	Colour	EAN
11109A	Silver	4043718332816

If you have any further questions, please contact marketing@inline-info.com **www.inline-info.com/en/**

Disclaimer
InLine® is a brand of INTOS ELECTRONIC AG | Siemensstraße 11 | D-35394 Gießen

Documentation © 2026 INTOS ELECTRONIC AG
All rights reserved. No part of this document may be reproduced in any form or by any means, electronic, mechanical or chemical, without the prior written permission of the publisher.
It is possible that this document may still contain typographical faults or misprints.

However, the information in this deocument will be checked regularly and corrections will be made in the next edition. We accept no liability for errors of a technical or printing nature and their consequences. All trademarks and industrial property rights are acknowledged. Changes in the sense of technical progress can be made without prior notice. Our products, including packaging, are not toys, they may contain small parts and sharp objects.

Please keep away from children.